

# Technical data sheet

## Roof conductor holder for tiled roofs, Rd 8–10

Item number: 5215587



- Conductor holder of polyamide
- Including drill hole in bottom section for quick installation




**A2** Stainless steel

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 5215587                  |
| Type                               | 157 FK-VA 280            |
| Description 1                      | Roof conductor holder    |
| Manufacturer                       | OBO                      |
| Dimension                          | 8mm                      |
| Material                           | Stainless steel 1.4301   |
| Smallest sales unit                | 20                       |
| Unit of quantity                   | Piece                    |
| Weight                             | 10.17 kg                 |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,3635 kg CO2e / 1 Piece |

### Dimensions

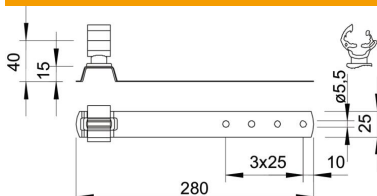

|             |        |
|-------------|--------|
| Length      | 280 mm |
| Dimension L | 280 mm |

# Technical data sheet

Roof conductor holder for tiled roofs, Rd 8–10

Item number: 5215587



## Technical data

|                          |                       |
|--------------------------|-----------------------|
| Application              | Roof surface          |
| Conductor fastening type | With clamp clip       |
| Conductor diameter, max. | 10                    |
| Conductor diameter, min. | 8                     |
| Mounting type            | Screw-on              |
| Mounting height          | 40 mm                 |
| Fit                      | Rd 8-10 mm            |
| Material of the holder   | Plastic               |
| Material of the support  | Rustproof steel (V2A) |