

# Technical data sheet

## Clamp clip, single, plastic pressure trough, FT

Item number: 1160222



Suitable for all C profile rails with slot width 16–17 mm.  
Hot-dip galvanised steel clip and bolt, polypropylene pressure trough, halogen-free, colour light grey RAL 7035.  
Version with welding and/or locknuts for use under difficult circumstances and for shake protection on request.



|    |                    |
|----|--------------------|
| St | Steel              |
| FT | Hot-dip galvanised |

### Master data

|                                    |                         |
|------------------------------------|-------------------------|
| Item number                        | 1160222                 |
| Type                               | 2056 22 FT              |
| Description 1                      | Clamp clip              |
| Manufacturer                       | OBO                     |
| Dimension                          | 16-22mm                 |
| Material                           | Steel                   |
| Surface                            | Hot-dip galvanised      |
| Surface standard                   | DIN EN ISO 1461         |
| Smallest sales unit                | 100                     |
| Unit of quantity                   | Piece                   |
| Weight                             | 3.68 kg                 |
| Weight unit                        | kg/100 pc.              |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0866 kg COe / 1 Piece |


# Technical data sheet

## Clamp clip, single, plastic pressure trough, FT

Item number: 1160222



### Dimensions

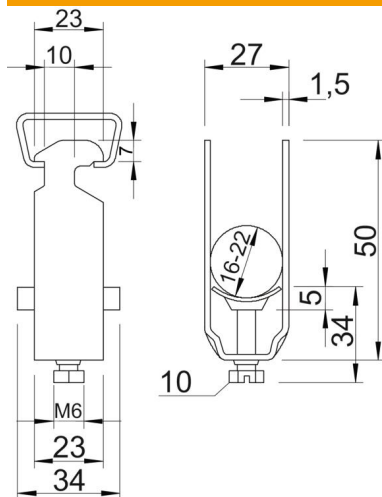

|                  |        |
|------------------|--------|
| Dimension A      | 23 mm  |
| Dimension B      | 27 mm  |
| Dimension C      | 34 mm  |
| Dimension G (mm) | M6     |
| Dimension H      | 50 mm  |
| Dimension L      | 34 mm  |
| Dimension t      | 1.5 mm |
| Dimension x      | 5 mm   |

### Technical data

|                                                |                |
|------------------------------------------------|----------------|
| Number of cables/pipes                         | 1              |
| for rail with slot width (with interval), max. | 17 mm          |
| for rail with slot width (with interval), min. | 16 mm          |
| Halogen-free                                   | yes            |
| Max. Tightening torque                         | 3 Nm           |
| With plastic trough                            | yes            |
| With metal trough                              | no             |
| Mounting type                                  | Profile rail   |
| Impact-resistant                               | no             |
| Clamping range D, max.                         | 22 mm          |
| Clamping range D, min.                         | 16 mm          |
| Surface addition                               | hot galvanised |
| Material addition                              | Steel          |
| With counter-trough                            | no             |
| Material of trough                             | Plastic        |
| Material quality of trough                     | Polypropylene  |