


# Technical data sheet

## Cable ladder PS75, 3 m

Item no. 6903423

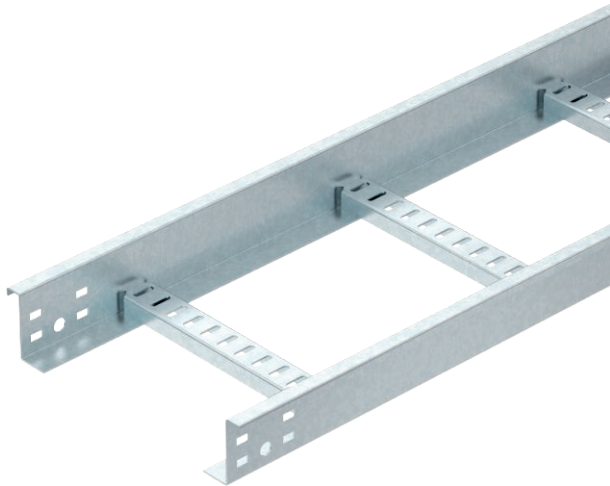

Heavy-duty PS75 cable ladder system, welded version. The side height is 75 mm with a supply length of 3,000 mm.  
6,000 mm delivery length on request.

Magnetic shield insulation without cover 10 dB, with cover 15 dB.




**St** Steel

**FT** Hot-dip galvanised

### Master data

Item no.	6903423
Type	PS75 600 HDG
Description 1	Cable ladder
Description 2	heavy PS75
Dimension	75x650x3000
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit (VG)	3 m
Weight	708,34 kg/100 m

### Technical data



Length	3.000,00 mm
Width	600,00 mm
Height	75,00 mm
Side height	75,00 mm
Dimension B	600,00 mm
Dimension H	75,00 mm
Dimension L	75,00 mm
Rail thickness	2,00 mm
Rung distance	300,00 mm

### Appr. load:

Support spacing 2.0 m	3,90 kN/m
Support spacing 4.0 m	0,90 kN/m
Support spacing 6.0 m	0,30 kN/m

### Technical data