


# Technical data sheet

Underfloor installation duct, 2-compartment, trunking  
height 48 mm  
Item number: 7400308



Underfloor installation duct for laying cables under the floor.

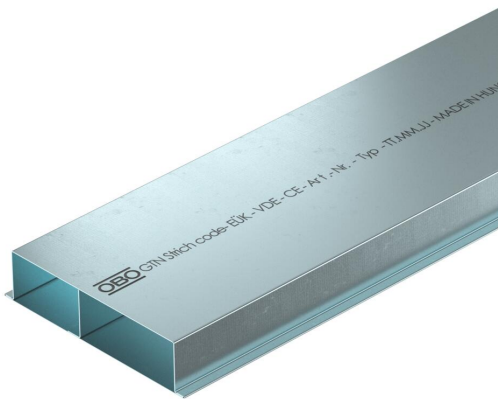

- St Steel
- FS Strip galvanized

| Master data                        |                         |
|------------------------------------|-------------------------|
| Item number                        | 7400308                 |
| Type                               | S2 19048                |
| Description 1                      | Underfloor duct         |
| Description 2                      | 2 compartments          |
| Manufacturer                       | OBO                     |
| Dimension                          | 2000x190x48             |
| Material                           | Steel                   |
| Surface                            | Strip galvanized        |
| Surface standard                   | DIN EN 10346            |
| Smallest sales unit                | 2                       |
| Unit of quantity                   | Metre                   |
| Weight                             | 376 kg                  |
| Weight unit                        | kg/100 m                |
| CO2 Footprint (GWP) Cradle-to-Gate | 8,6764 kg COe / 1 Meter |


# Technical data sheet

Underfloor installation duct, 2-compartment, trunking  
height 48 mm

Item number: 7400308



## Dimensions



|             |          |
|-------------|----------|
| Length      | 2,000 mm |
| Width       | 190 mm   |
| Height      | 48 mm    |
| Dimension a | 80 mm    |
| Dimension b | 110 mm   |
| Dimension h | 48 mm    |

## Technical data

|                                |                      |
|--------------------------------|----------------------|
| Number of fixed partitions     | 1                    |
| Number of compartments         | 2 St.                |
| Mounting system fastening type | Floor                |
| Floor plate                    | yes                  |
| Application area               | Screed-covered       |
| Decouplable                    | no                   |
| Duct height, min.              | 48 mm                |
| Usable cross-section           | 8556 mm <sup>2</sup> |
| Removable cover                | no                   |
| Cross-section, draw a          | 3588 mm <sup>2</sup> |
| Cross-section, draw b          | 4968 mm <sup>2</sup> |