

Technical data sheet

Connection element for installation in the insulated interception rod isFang IN
Item number: 5408024



- Screw-on termination of the connection for the isCon® cable
- Connection and installation of the cable in the insulated interception rod
- Tested up to 150 kA (lightning protection Class II)



A2 Stainless steel

Master data		
Item number	5408024	
Type	isCon IN connect	
Description 1	Connection element	
Description 2	for isCon conductor, internal	
Manufacturer	OBO	
Dimension	Ø23mm	
Material	Stainless steel 1.4301	
Smallest sales unit	1	
Unit of quantity	Piece	
Weight	26.9 kg	
Weight unit	kg/100 pc.	
CO2 Footprint (GWP) Cradle-to-Gate	1,2871 kg CO2e / 1 Piece	


Technical data sheet

Connection element for installation in the insulated interception rod isFang IN

Item number: 5408024



Dimensions

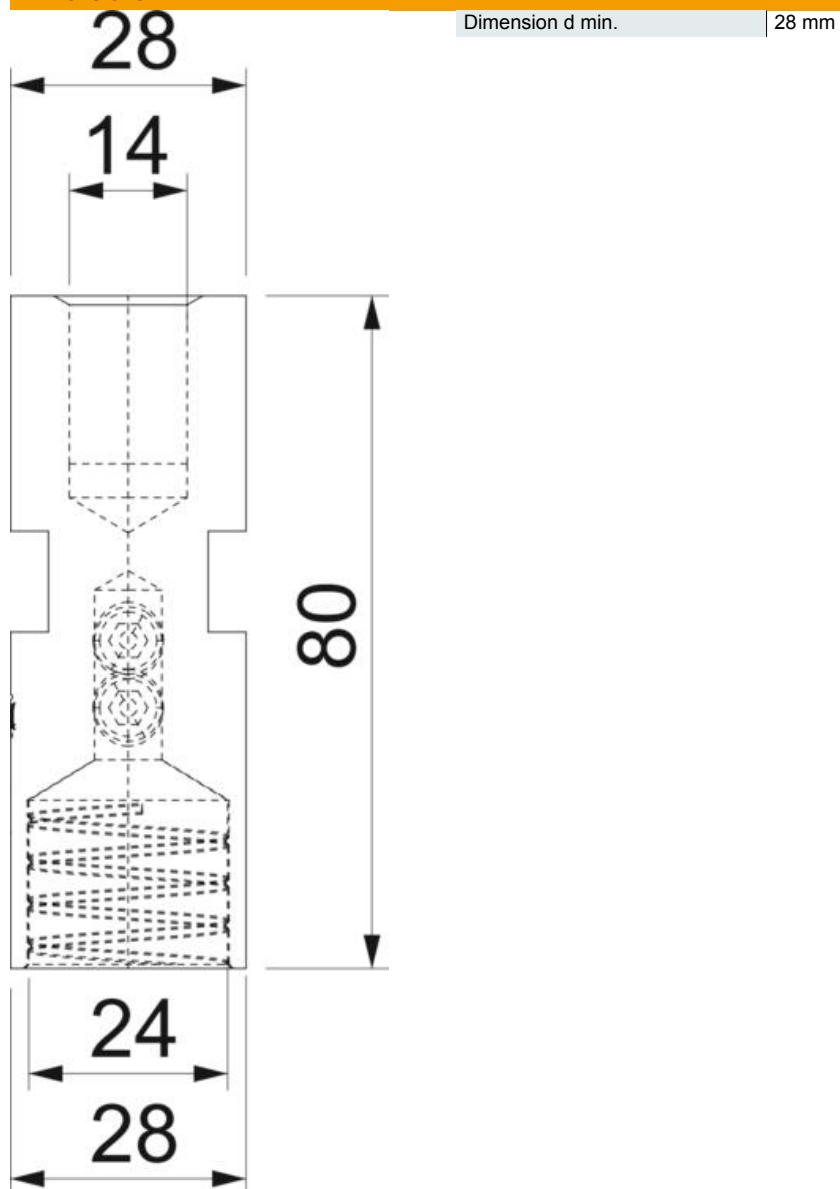

Technical data

Lightning current carrying capacity	H1/150 kA
Suitable for connection	Miscellaneous
Fit	23 mm
Clamping range, max.	23 mm